



PE1450SE
FLOOR PLAN

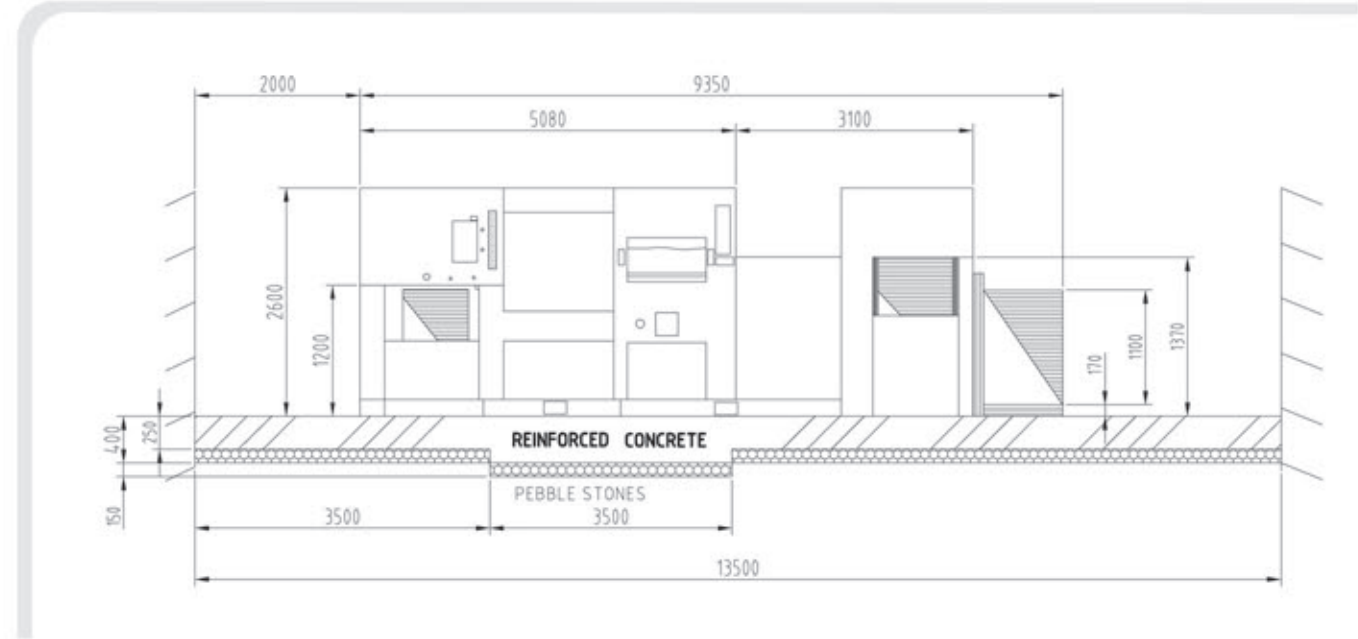

PE1450SE
FLOOR PLAN

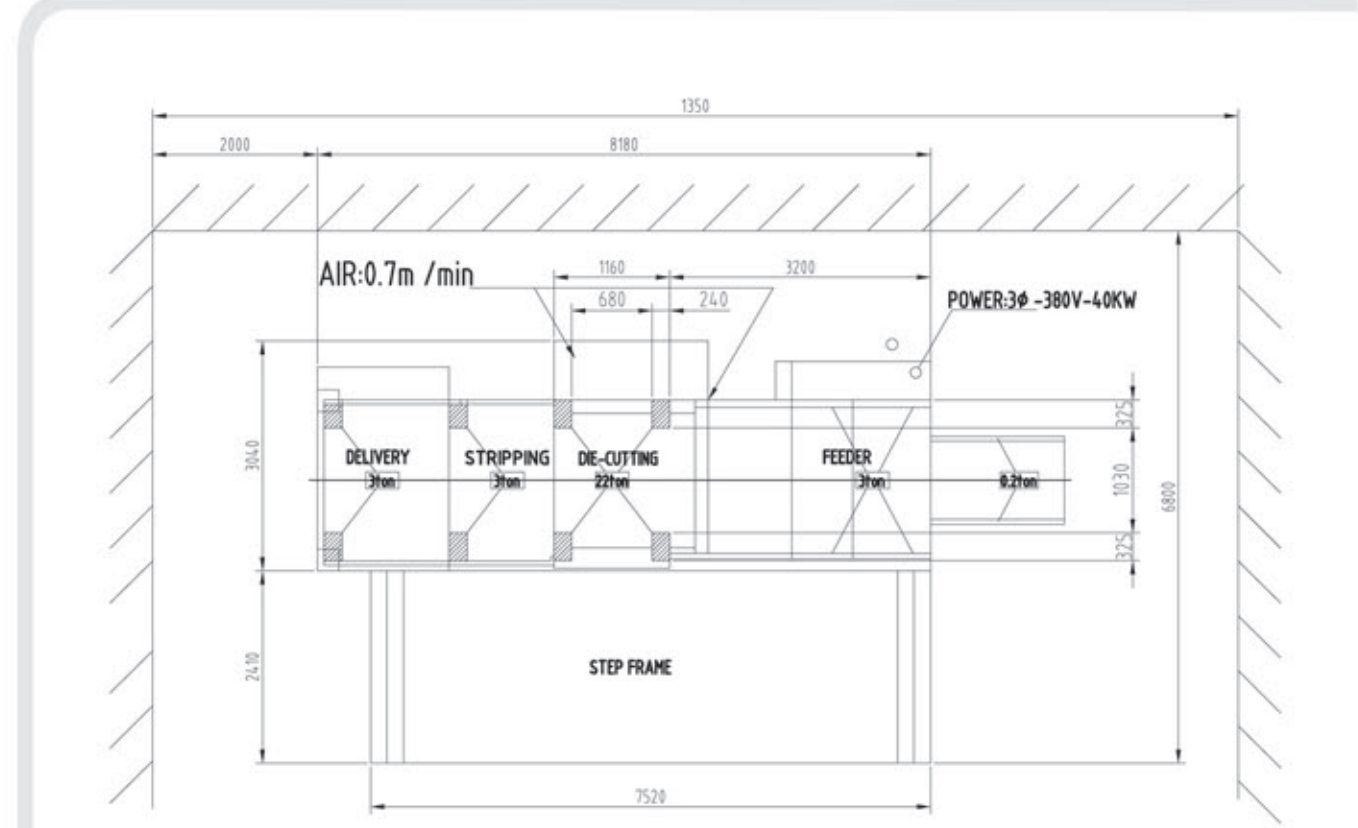

BRAUSSE PE1450SE

Specifications	
Max. Paper Size	1450 x 1100 mm (57" x 43 – 1/4")
Min. Paper Size	700 x 500 mm (27 – 1/2" x 19 – 3/4")
Max. Cutting Size	1420 x 1080 mm (55 – 7/8" x 42 – 1/2")
Max. Cutting Pressure	400 tons
Stock range : Cardboard	0.2 – 2 mm (0.008" – 0.078")
Corrugated board	0.7 – 4.5mm (0.028" – 0.18")
Min. Gripper Margin	10 mm
Gripper Bite Range	4.5 – 12mm
Inner Die Chase Size	1480 x 1106 mm (58 – 1/4" x 43 – 1/2")
Cutting Plate Size	1472 x 1086 mm (59" x 42 – 1/4")
Max. Mechanical Speed	5500 s/h
Other Power Required	36 KW
Overall Length	9880 mm
Overall Width	5270 mm
Overall Height	2580 mm
Total Net Weight (approx.)	28 tons

In the interest of product improvement,the manufacturer reserves the right to change specifications and features without notice.



Shanghai Eternal Machinery Co.,Ltd.

Shanghai Plant:
No. 1125 Taishun Road, Anting Town,
Jiading District, Shanghai, China
Tel: 86-21-59502451 59502481-2487
Fax: 86-21-59502477
E-mail: eterna.sales@gmail.com

Shanghai Office:
T11/13AB, Gateway Plaza,
No.2601 Xietu Road, Shanghai 200030 China
Tel: 86-21-64262538
Fax: 86-21-64262153
E-mail: lilian@eterna-shanghai.com

Agent

North American Office:
1-1500 Valmont Way, Richmond, V6V 1Y4,
Richmond, B.C.Canada
Tel: +16042782027
Fax: +16042781005




AUTOMATIC FLATBED DIECUTTING AND CREASING
MACHINE WITH STRIPPING STATION

BRAUSSE PE1450SE

BRAUSSE PE1450SE

AUTOMATIC FLATBED DIECUTTING AND CREASING
MACHINE WITH STRIPPING STATION

BRAUSSE
A MEMBER OF BOBST GROUP

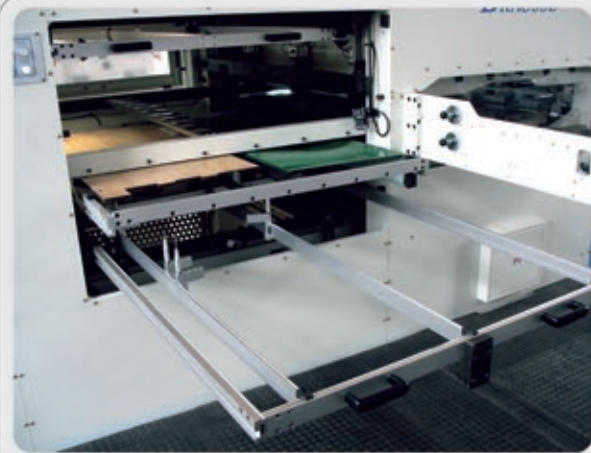


Stripping Section

- Triple action stripping system to ensure clean and positive waste stripping.
- Upper and lower stripping tool mounting frame can be pulled out for job set up and make ready.
- 300mm upper stripping frame raiser enhances greatly the operation space, more operator friendly.




Delivery Section

- Automatic high pile delivery system.
- Non-stop auxiliary delivery curtain for continuous production hence great productivity.
- Electrical batch counter and tape inserter presetting counter.

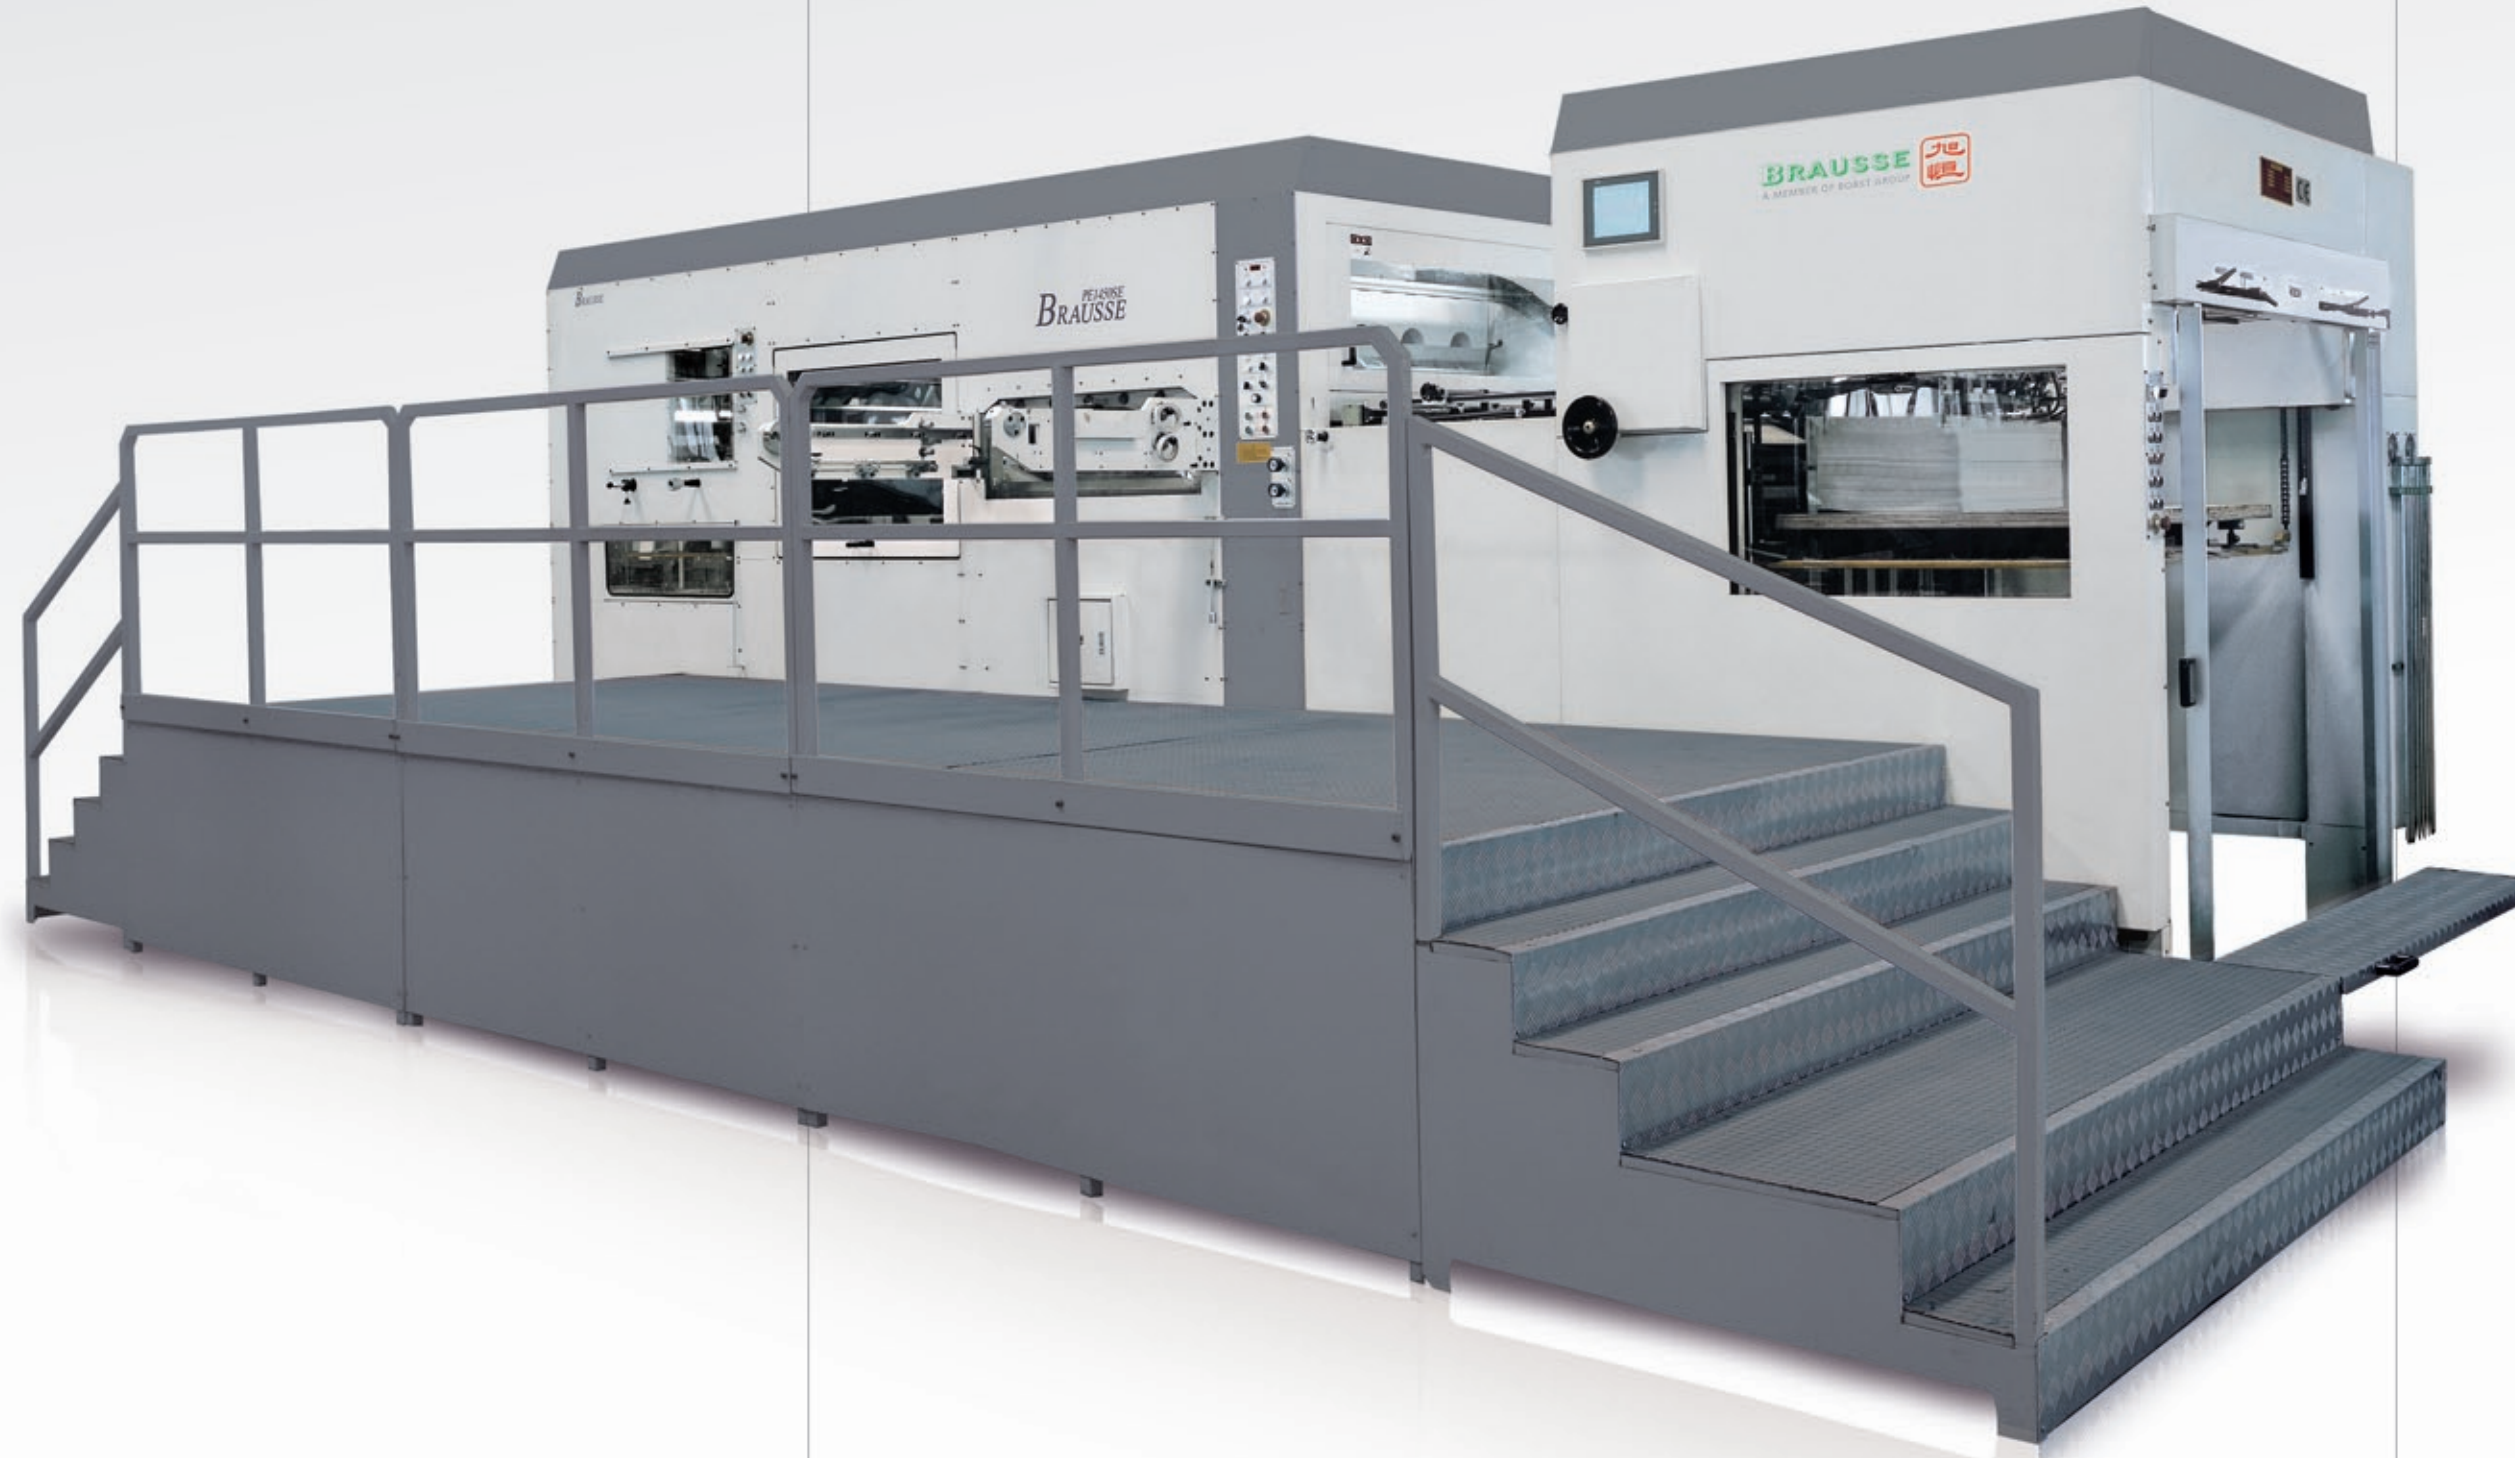

Feeder

- Four pick up and four forward suck heads with angle adjustment.
- New belt swing feeding rollers ensure smooth feeding even with wrap sheets
- Non-stop feeder with automatic pile lift

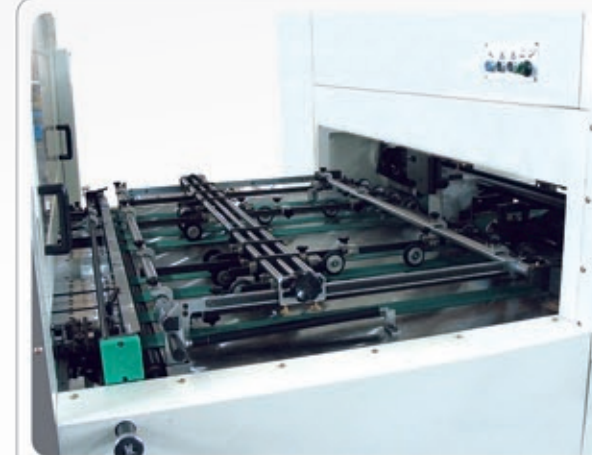

Blanking Transforming Position Section

- Side lays on both sides push and pull convertible.
- Sheet slow down device of feeding belts with selective on/off switch to ensure accurate registration of the sheet and the corrugated board at front lays.
- Special regulator to adjust sheet arrival timing at front lays while machine is running.



Die Cutting Section

- Accurate mobile platen position and pressure tonnage digital display for easy operation.
- Overloading safety device to limit maximum operating pressure at 400 tons.
- Four front lay stopper each with individual position adjustment.
- Gripper bar with individual position adjustment mechanism ensures precise sheet registration.